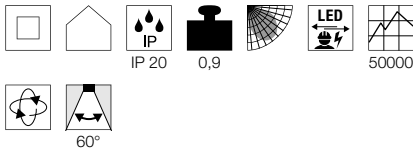


SUPROS
DL


FOLLOWER

LED
INSIDE

Productspecificaties

220-240 V ~ 50/60 Hz | 750 mA
Materiaal: aluminium

Maattekening

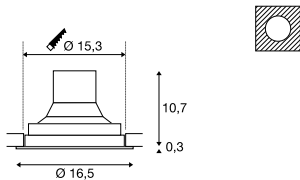

Aanwijzing

Materiaaldikte montagevlak: 25 mm max.

Aanbevolen accessoires

■ Reflector 20°	Art. nr. 114102	10,50 EUR	
■ Reflector 40°	Art. nr. 114104	10,50 EUR	

Variant	Art. nr.	EUR
2600 lm 3000 K CRI > 90 31 W		
■ zwart	1003299	205,00
2600 lm 3000 K CRI > 90 31 W		
□ wit	1003300	205,00
2700 lm 4000 K CRI > 90 31 W		
■ zwart	1003303	205,00
2700 lm 4000 K CRI > 90 31 W		
□ wit	1003304	205,00
3380 lm 3000 K CRI > 90 36 W		
■ zwart	1003301	215,00
3380 lm 3000 K CRI > 90 36 W		
□ wit	1003302	215,00
3520 lm 4000K CRI > 90 36 W		
■ zwart	1003305	215,00
3520 lm 4000K CRI > 90 36 W		
□ wit	1003306	215,00

1003299 442

