


WORKLIGHT  
FLLED  
INSIDE

157905 88


- Direct en indirect licht

## Productspecificaties

220-240 V ~ 50/60 Hz | 226 mA  
Systeemvermogen: 35 W  
Materiaal: aluminium / acryl

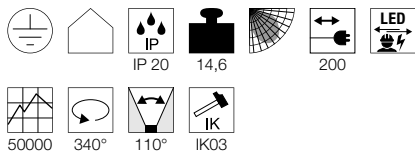

## Maattekening



## Aanwijzing

Schakelaar op de lampschacht  
Geeerde stekker

Variant	Art. nr.	EUR
Direct: 1850 lm   3000 K   CRI > 80 Indirect: 1850 lm   3000 K   CRI > 80 □ mat wit	157901	855,00
Direct: 1850 lm   3000 K   CRI > 80 Indirect: 1850 lm   3000 K   CRI > 80 ■ mat antraciet	157905	855,00
Direct: 1850 lm   4000 K   CRI > 80 Indirect: 1850 lm   4000 K   CRI > 80 □ mat wit	1003520	855,00
Direct: 1850 lm   4000 K   CRI > 80 Indirect: 1850 lm   4000 K   CRI > 80 ■ mat antraciet	1003521	855,00

