







1004759 121

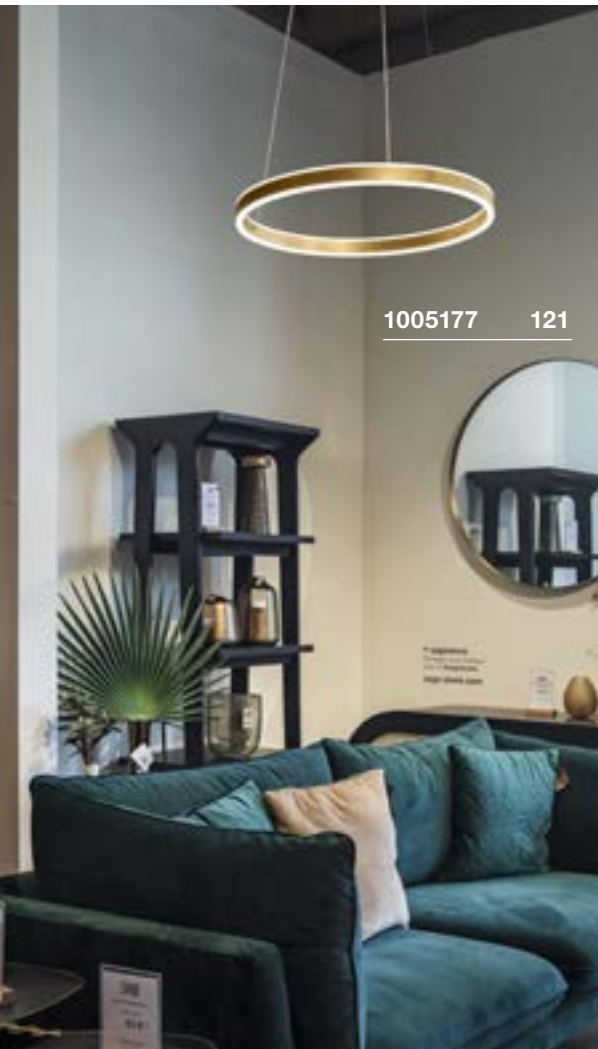

1005177 121

ONE 60
PD, DALI, up/down

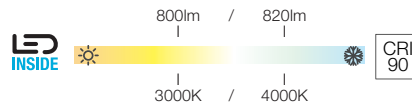

220 - 240 V ~ 50/60 Hz | 600 mA
Systeemvermogen: 25 W
Materiaal: aluminium/staal







Up/Down	400/410lm 3000/4000K	

Variant	Art. nr.
Up: 400/410 lm 3000/4000 K CRI 90 Down: 400/410 lm 3000/4000 K CRI 90	
■ zwart	1004761
Up: 400/410 lm 3000/4000 K CRI 90 Down: 400/410 lm 3000/4000 K CRI 90	
□ wit	1004762

ONE 60
PD, PHASE, up/down



NEW VARIANT

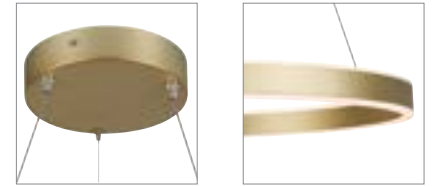

220 - 240 V ~ 50/60 Hz | 600 mA
Systeemvermogen: 24 W
Materiaal: aluminium/staal



Up/Down	410/415lm 2700/3000K	

Variant	Art. nr.
Up: 410/415 lm 2700/3000 K CRI 90 Down: 410/415 lm 2700/3000 K CRI 90	
■ zwart	1004759
Up: 410/415 lm 2700/3000 K CRI 90 Down: 410/415 lm 2700/3000 K CRI 90	
□ wit	1004760
Up: 410/415 lm 2700/3000 K CRI 90 Down: 410/415 lm 2700/3000 K CRI 90	
■ messing	1005177