





1000786 262

PANEL 60
CL, rond, DALI



IP 20 | 110° | 22 | L70B50 | 40




100-277 V ~ 50/60 Hz | 1000 mA
Systeemvermogen: 43 W
Materiaal:
aluminium / polymethylmethacrylaat (PMMA)



1003040, 1003041, 1003042, 1003043	3150lm 3350lm 3000K 4000K	

Variant	Art. nr.
3150 lm 3000 K CRI 80	
<input type="checkbox"/> wit	1003040
3350 lm 4000 K CRI 80	
<input type="checkbox"/> wit	1003041
3150 lm 3000 K CRI 80	
<input checked="" type="checkbox"/> grijs	1003042
3350 lm 4000 K CRI 80	
<input checked="" type="checkbox"/> grijs	1003043

PANEL
CL, 1200x300 mm, DALI

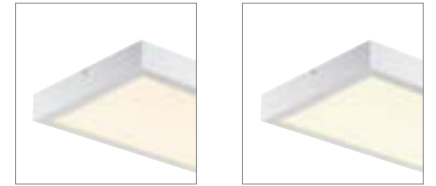

IP 20 | 90° | 19 | L70B50 | 40

100-277 V ~ 50/60 Hz | 1000 mA
Systeemvermogen: 43 W
Materiaal:
aluminium / polymethylmethacrylaat (PMMA)



1003052, 1003053, 1003054, 1003055	3100lm 3400lm 3000K 4000K	

Variant	Art. nr.
3100 lm 3000 K CRI 90	
<input type="checkbox"/> wit	1003052
3400 lm 4000 K CRI 80	
<input type="checkbox"/> wit	1003053
3100 lm 3000 K CRI 80	
<input checked="" type="checkbox"/> grijs	1003054
3400 lm 4000 K CRI 80	
<input checked="" type="checkbox"/> grijs	1003055