






APONI 90
Pole, PHASE

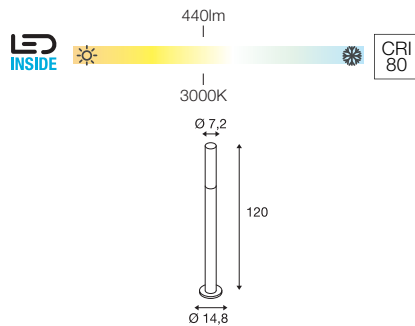


APONI 120
Pole, PHASE

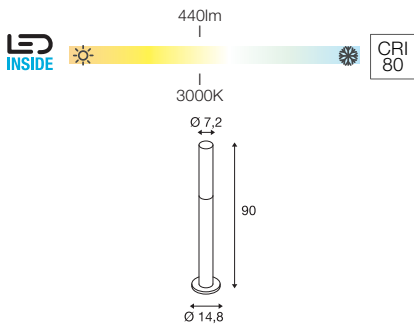

IP 65 L70B50

220-240 V ~ 50/60 Hz
Systeemvermogen: 8 W
Materiaal: aluminium

- Open kabeleinde



IP 65 L70B50

220-240 V ~ 50/60 Hz
Systeemvermogen: 8 W
Materiaal: aluminium

- Open kabeleinde



		A → G
1000682	520lm 3000K	A ↑ G ↓ E →



		A → G
1000683	520lm 3000K	A ↑ G ↓ E →



■ IP68 verbindingsbox, 3-polig
Art. nr. 228730



■ IP68 verbindingsbox, 3-polig
Art. nr. 228730



Variant	Art. nr.
440 lm 3000 K CRI 80 ■ antraciet	1000682

Variant	Art. nr.
440 lm 3000 K CRI 80 ■ antraciet	1000683



1000683 558

