



1000735 599







228555 599

HELIA SPOT S  
SP, single, PHASE



HELIA SPOT L  
SP, single, PHASE

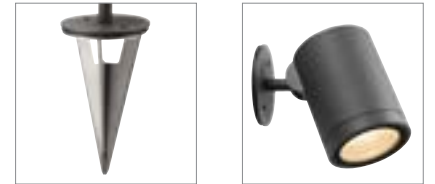

IP 66 IK04 35° L70B50 330°  
  
 90° 300

220-240 V ~ 50/60 Hz | 500 mA  
Systeemvermogen: 6,5 W  
Materiaal: aluminium

- IP44 geaarde stekker



IP 66 IK04 50° L70B50 320°  
  
 90° 300

220-240 V ~ 50/60 Hz | 700 mA  
Systeemvermogen: 15 W  
Materiaal: aluminium

- IP44 geaarde stekker



		A → G
1000735	440lm 3000K	A f G E



		A → G
228555	1340lm 3000K	A f G E



■ Grondpin  
Art. nr. 1000736



■ Grondpin  
Art. nr. 1000736

Variant	Art. nr.
440 lm   3000 K   CRI 80	
■ antraciet	1000735

Variant	Art. nr.
1340 lm   3000 K   CRI 80	
■ antraciet	228555