





SITRA S
WL, single, vierkant



NEW



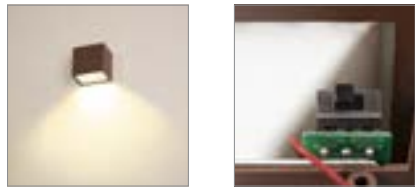


220-240 V ~ 50/60 Hz | 500 mA
Systeemvermogen: 6,2 W
Materiaal: aluminium/glas

SITRA M
WL, up/down, vierkant



NEW

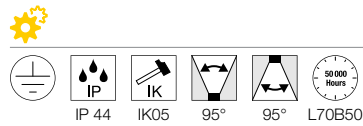



220 - 240 V ~ 50/60 Hz | 350 mA
Systeemvermogen: 14 W
Materiaal: aluminium/glas

SITRA L
WL, up/down, vierkant



NEW

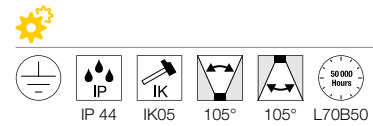

220 - 240 V ~ 50/60 Hz | 600 mA
Systeemvermogen: 24 W
Materiaal: aluminium/glas

1005148, 1005149, 1005150	580/620lm 3000/4000K	

Variant	Art. nr.
580/620 lm 3000/4000 K CRI 80	
antraciet	1005148
580/620 lm 3000/4000 K CRI 80	
wit	1005149
580/620 lm 3000/4000 K CRI 80	
roest	1005150

Up/Down	800/850lm 3000/4000K	

Variant	Art. nr.
Up: 800/850 lm 3000/4000 K CRI 80 Down: 800/850 lm 3000/4000 K CRI 80	
antraciet	1005151
Up: 800/850 lm 3000/4000 K CRI 80 Down: 800/850 lm 3000/4000 K CRI 80	
wit	1005153
Up: 800/850 lm 3000/4000 K CRI 80 Down: 800/850 lm 3000/4000 K CRI 80	
roest	1005154

Up/Down	1350/1400lm 3000/4000K	

Variant	Art. nr.
Up: 1350/1400 lm 3000/4000 K CRI 80 Down: 1350/1400 lm 3000/4000 K CRI 80	
antraciet	1005155
Up: 1350/1400 lm 3000/4000 K CRI 80 Down: 1350/1400 lm 3000/4000 K CRI 80	
wit	1005156
Up: 1350/1400 lm 3000/4000 K CRI 80 Down: 1350/1400 lm 3000/4000 K CRI 80	
roest	1005157