








LOGS IN WL



LOGS IN WL, PHASE

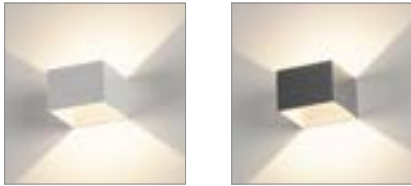

100 - 240 V ~ 50/60 Hz | 500 mA  
Systeemvermogen: 6 W  
Materiaal: aluminium



220-240 V ~ 50/60 Hz | 250 mA  
Systeemvermogen: 11 W  
Materiaal: aluminium




151320, 151321, 151325	300lm   470lm 3000K	



1000638, 1000639, 1000640	430lm   690lm 2000-3000K	

Variant	Art. nr.
300 lm   3000 K   CRI 90	
zwart/goud	<b>151320</b>
470 lm   3000 K   CRI 90	
wit	<b>151321</b>
470 lm   3000 K   CRI 90	
aluminium/wit	<b>151325</b>

Variant	Art. nr.
430 lm   2000-3000 K   CRI 90	
zwart/goud	<b>1000638</b>
690 lm   2000-3000 K   CRI 90	
wit	<b>1000639</b>
690 lm   2000-3000 K   CRI 90	
aluminium/wit	<b>1000640</b>

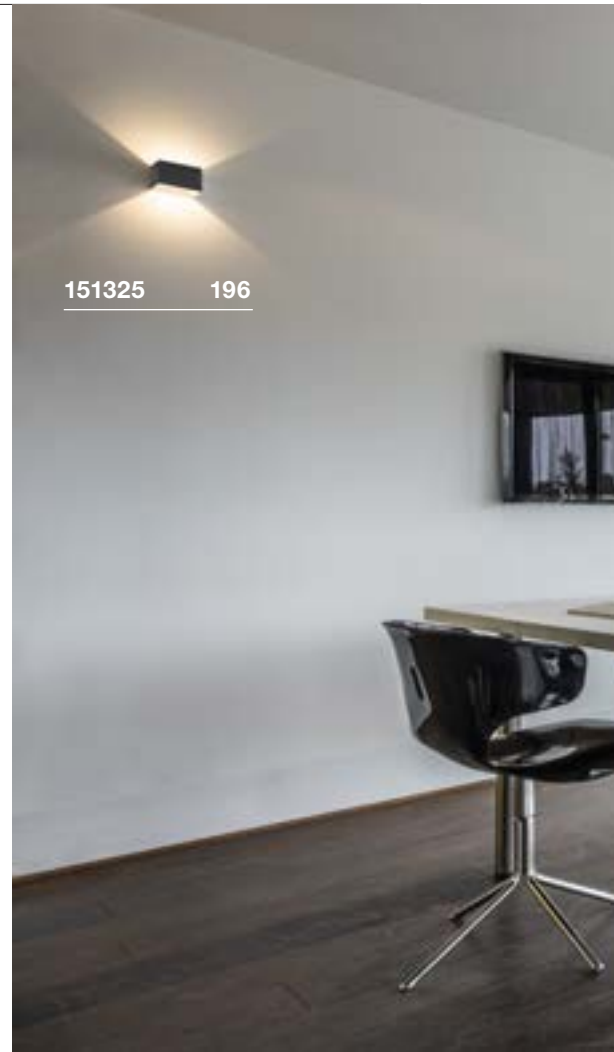

151325 196



1000639 196