










ESKINA FRAME 45
Pole, single



ESKINA FRAME 75
Pole, single



ESKINA FRAME 75
Pole, double

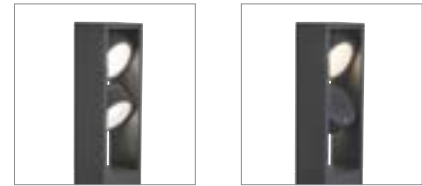

220 - 240 V ~ 50/60 Hz | 350 mA
Systeemvermogen: 15 W
Materiaal: aluminium

220 - 240 V ~ 50/60 Hz | 350 mA
Systeemvermogen: 15 W
Materiaal: aluminium

220-240 V ~ 50/60 Hz | 700 mA
Systeemvermogen: 27 W
Materiaal: aluminium

Spot	1100/1200lm 3000/4000K	

Spot	1100/1200lm 3000/4000K	

Spot 1/Spot 2	1100/1200lm 3000/4000K	

IP68 verbindingsbox, 3-polig
Art. nr. 228730

IP68 verbindingsbox, 3-polig
Art. nr. 228730

IP68 verbindingsbox, 3-polig
Art. nr. 228730

Variant Art. nr.
1100/1200 lm | 3000/4000 K | CRI 80
 antraciet **1004749**

Variant Art. nr.
1100/1200 lm | 3000/4000 K | CRI 80
 antraciet **1004750**

Variant Art. nr.
Spot 1: 1100/1200 lm | 3000/4000 K | CRI 80
Spot 2: 1100/1200 lm | 3000/4000 K | CRI 80
 antraciet **1004751**