

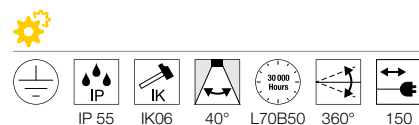
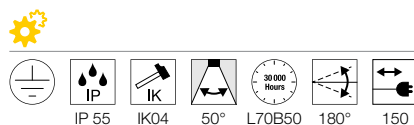
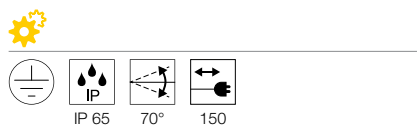
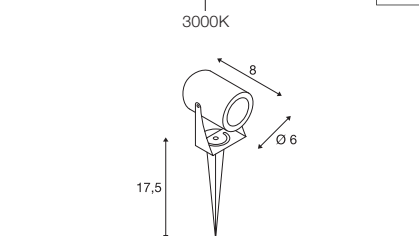
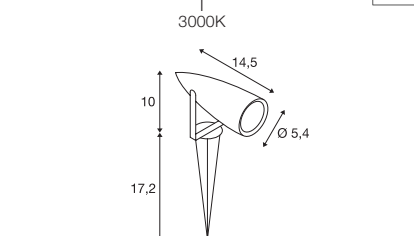
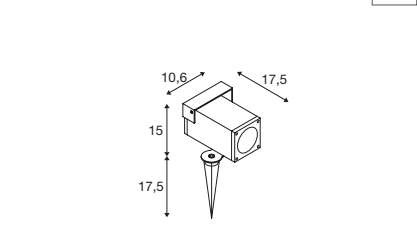




THEO BRACKET SP



SYNA SP

LED SPIKE SP



220-240 V ~ 50/60 Hz
Materiaal: aluminium/glas

- IP44 gearde stekker

220-240 V ~ 50/60 Hz
Systeemvermogen: 9 W
Materiaal: aluminium/glas

- IP44 gearde stekker

100-240 V ~ 50/60 Hz | 240 mA
Systeemvermogen: 6 W
Materiaal: aluminium/glas

- IP44 gearde stekker

GU10 < 7 W
Ø: 5,1 cm L: 5,7 cm

LED GU10 51 mm | 4 W | 36°
2700 K | 270 lm | EEK=G
4 kWh / 1000 h

Art. nr. 1004972

Variant	Art. nr.
1xGU10	
■ antraciet	1004652

Light bulb icon

Art. nr.	Light output	Color temperature	Beam angle
227505, 227504, 227507	470lm	3000K	A → G
			A F E

Variant	Art. nr.
470 lm 3000 K CRI 80	
■ antraciet	227505
470 lm 3000 K CRI 80	
■ grijs	227504
470 lm 3000 K CRI 80	
■ roest	227507

Light bulb icon

Art. nr.	Light output	Color temperature	Beam angle
1002201, 1002203	400lm	3000K	A → G
			A F

Variant	Art. nr.
400 lm 3000 K CRI 80	
■ antraciet	1002201
400 lm 3000 K CRI 80	
■ roest	1002203