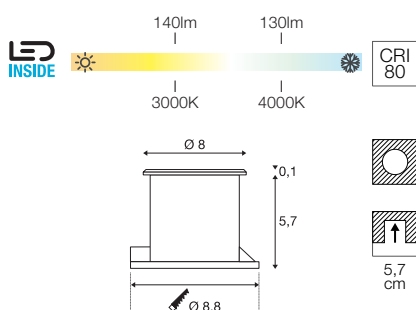


DASAR® FLAT 80
EL

IP 65 / IP 67

IK08

125°

L70B50

150

0.5 t



220-240 V ~ 50/60 Hz
Systeemvermogen: 3,5 W
Materiaal: roestvrij staal 304 / glas

- Inbouwpot incl.
- Het armatuur is geschikt voor inbouw in hout
- Open kabeleinde



228412, 1002188	140lm 130lm 3000K 4000K	



■ IP68 verbindingsbox, 3-polig
Art. nr. 228730



Variant	Art. nr.
140 lm 3000 K CRI 80	
■ roestvrij staal	228412
130 lm 4000 K CRI 80	
■ roestvrij staal	1002188

228412 716

